

1.0

WIRELESS WIFI CONFIGURATION

1.1 APP Download


Method 1: Scan the QR code on the right with your mobile device to download the app.

Method 2: Search for "Things-X" in the App Store or Google Play Store to download the app.



1.2 Registration and Login

On the app's login page, click the "Register" button and fill in the required information. The system will send an account activation link to your email. Click the link and set your password to complete the registration process.

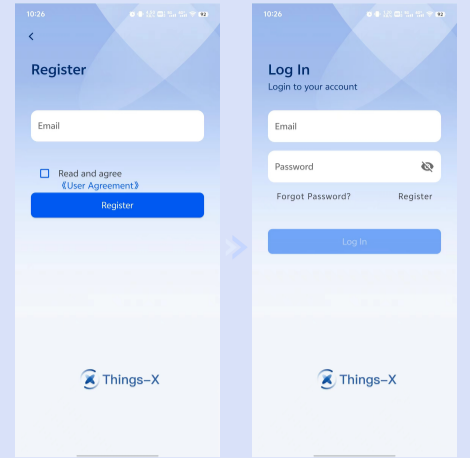

2.0

NETWORK CONFIGURATION AND ADDING DEVICES


When performing network configuration, ensure the app has camera permissions and that your phone's Bluetooth is turned on.

2.1 Network Configuration for Devices such as Micro Storage

Click the "+" or "Add Device" button in the top right corner. If your device is a micro energy storage, micro inverter, charging box, or battery, follow these steps. For example, to add a "Micro energy storage" device:

Method 1: Scan the QR code

- ① Scan the QR code on the device and click "Bind Device" to successfully bind the device.
- ② On the configuration page, follow the instructions, click "Go to Config," and enter the Device WiFi Setup page. After connecting via Bluetooth, enter the WiFi username and password, then click "Confirm." The page will indicate a successful configuration.

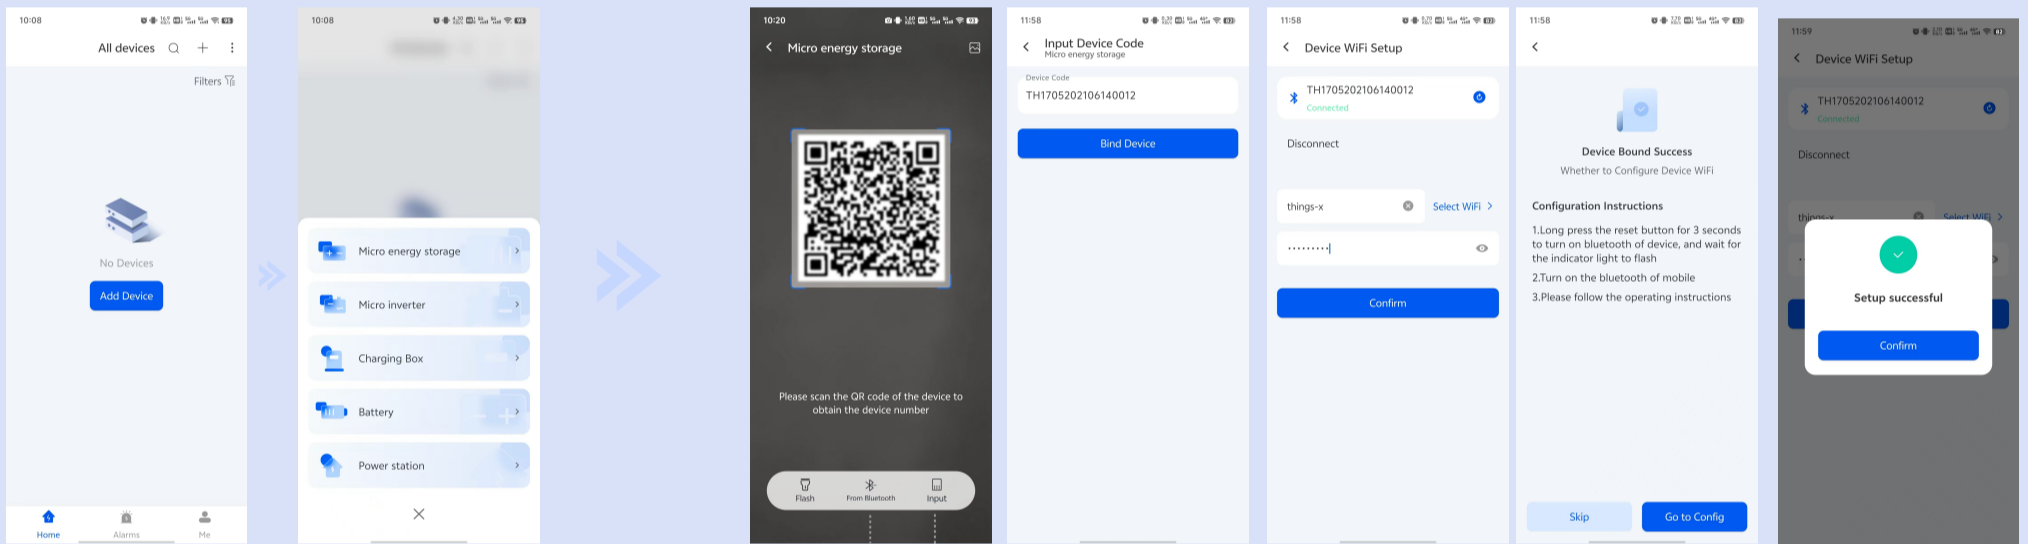

Method 2: Bluetooth Binding

Click "From Bluetooth," press and hold the Bluetooth reset button for 3 seconds, and select the corresponding Bluetooth device.


Method 3: Enter Device Code to Bind

Click "Input," input the device code, click "Bind Device," then press and hold the Bluetooth reset button for 3 seconds.

2.2 Network Configuration for Inverters

If your device is an inverter and needs to be mounted under a power station, follow these steps for network configuration:

- ① Add a device, select "Power Station," complete the power station information, and click "Create."
- ② On the "Power Station" -> "Devices" page, click "Bind Collector" to open the camera.
- ③ Scan the QR code on the device and enter the PWD. The remaining steps are the same as for configuring micro storage devices.

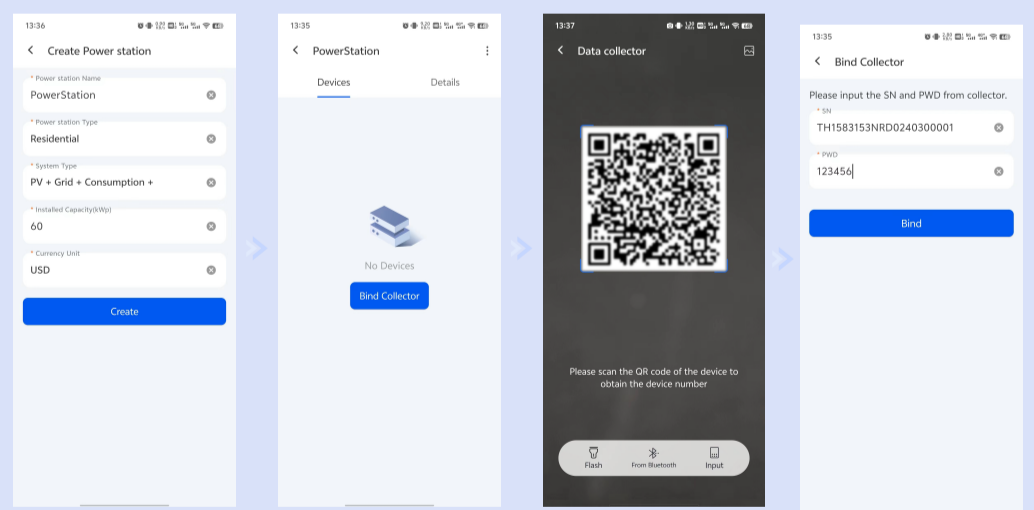

3.0

COLLECTOR FAULT ANALYSIS AND INDICATOR LIGHT STATUS

- ① If the Bluetooth connection fails, check if the Bluetooth light is flashing.
- ② If the network configuration fails, verify that the WiFi username and password are correct and available.
- ③ If the mobile phone cannot use the QR code scanner, check if the app has been granted authorization.

Indicator Light Status:

- ① READY: Steady light indicates the collector stick is powered on.
- ② COM: Flashes when the collector stick is transmitting data with the device.
- ③ NET: Network indicator light (Bluetooth light).

Other Operational Notes:

- ① Press and hold the collector reset button for 3 seconds to enter Bluetooth broadcast mode (except for long-term broadcasting Bluetooth devices).
- ② Press the collector button for 1-2 seconds to reset it.